
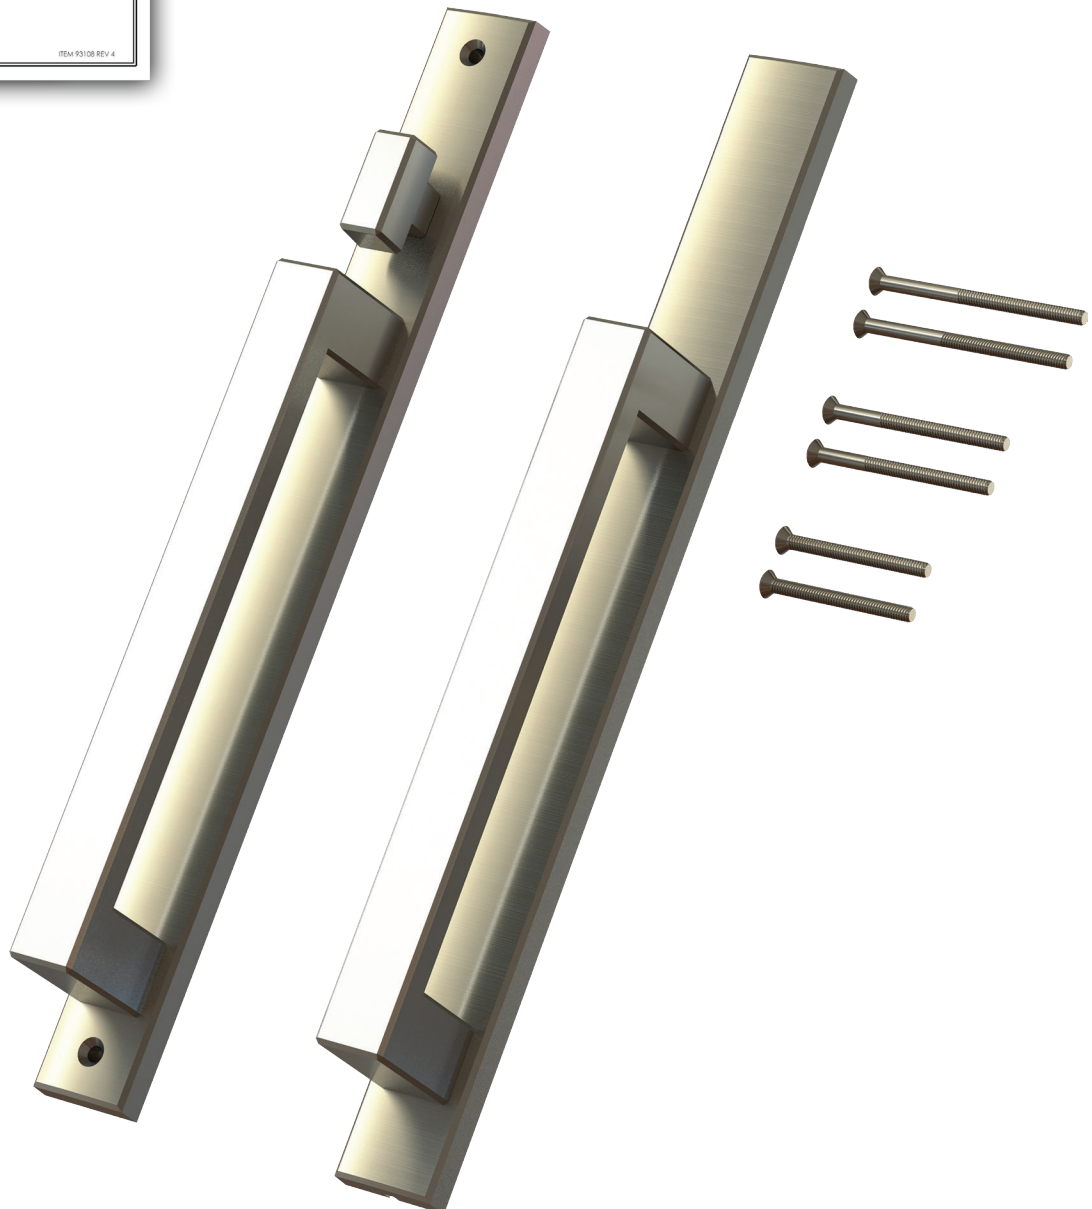


40.68.xx.100 SEMI-ACTIVE HANDLE KIT

Included in the 40.68.xx.100 Semi-Active handle kit:



- Interior handle assembly.
- Exterior handle assembly with full length gasket.
- 3 sets of door mounting screws of 1 3/4", 2 1/8", 2 1/2" lengths to fit stile thicknesses ranging from 1.25" to 2.25".
- Assembly instruction sheet.

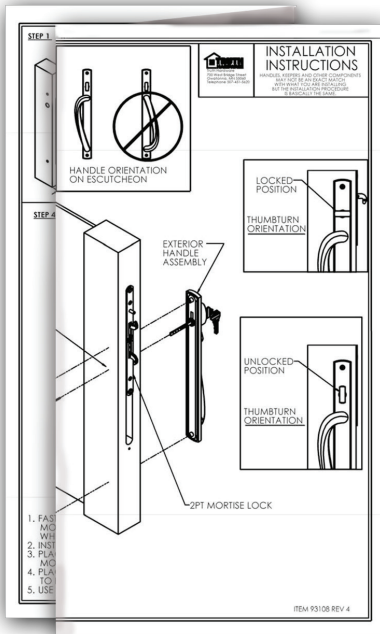


40.68.xx.101 ACTIVE HANDLE KIT

Included in the 40.94.xx.101 Active handle kit:

- Interior handle assembly.
- Exterior handle assembly with full length gasket.
- 3 sets of door mounting screws of 1 3/4", 2 1/8", 2 1/2" lengths to fit stile thicknesses ranging from 1.25" to 2.25".
- KD SCH-C style 5-pin Key cylinder. (KA available separately)
- 2 keys.
- Assembly instruction sheet.

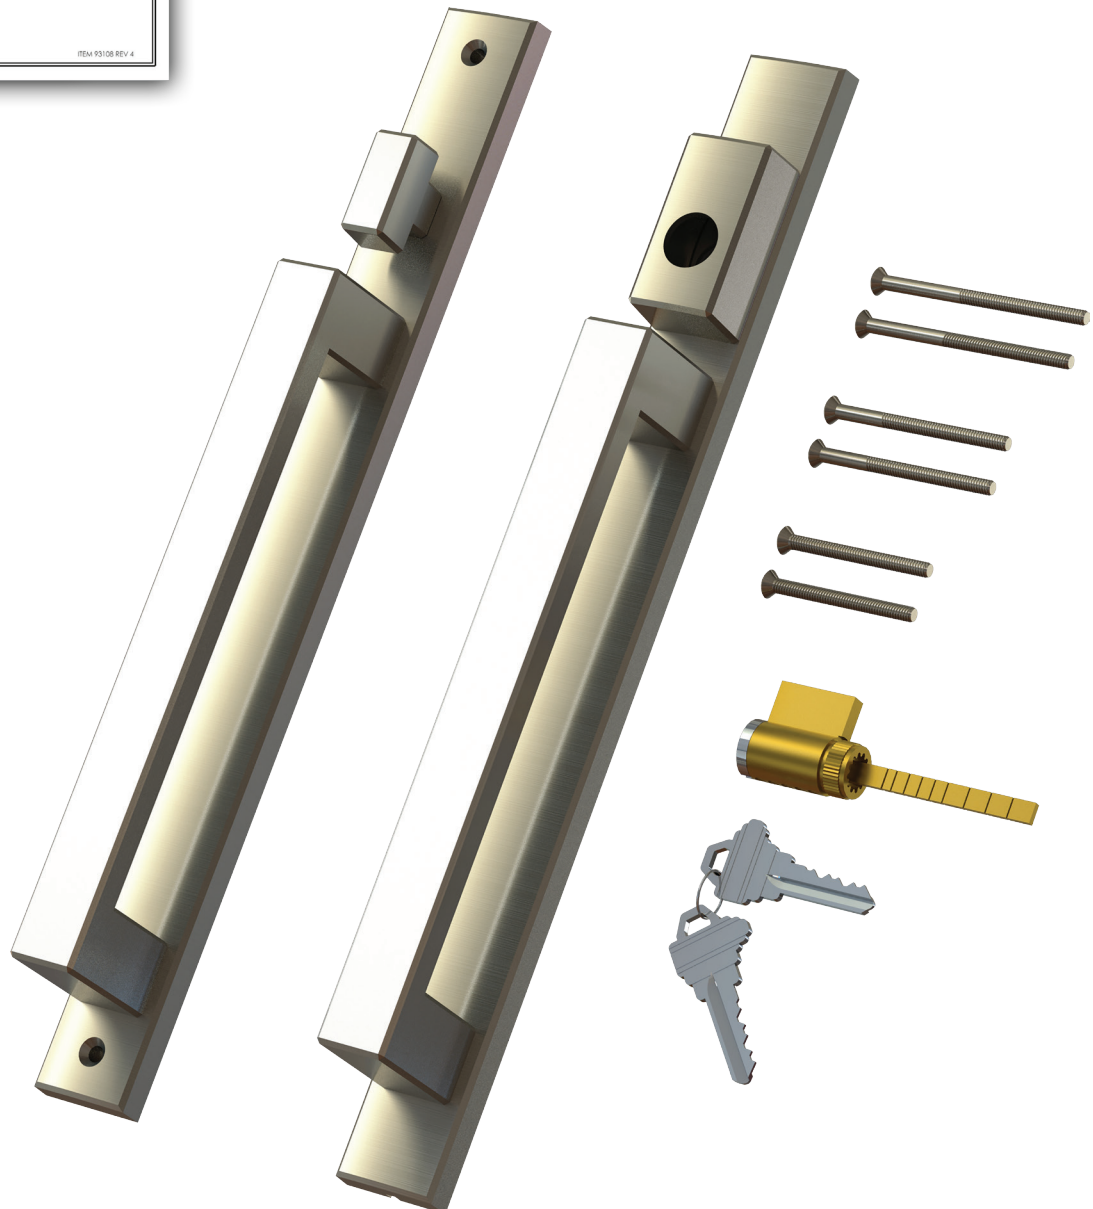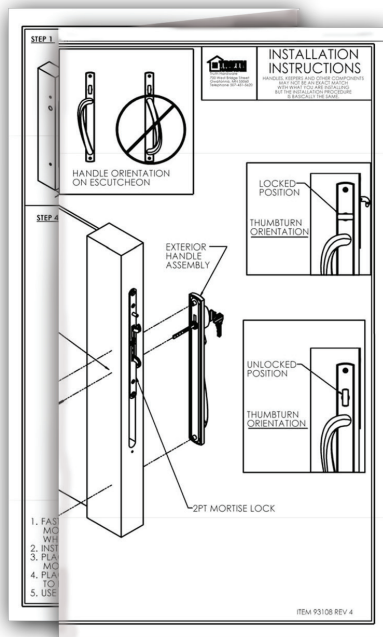


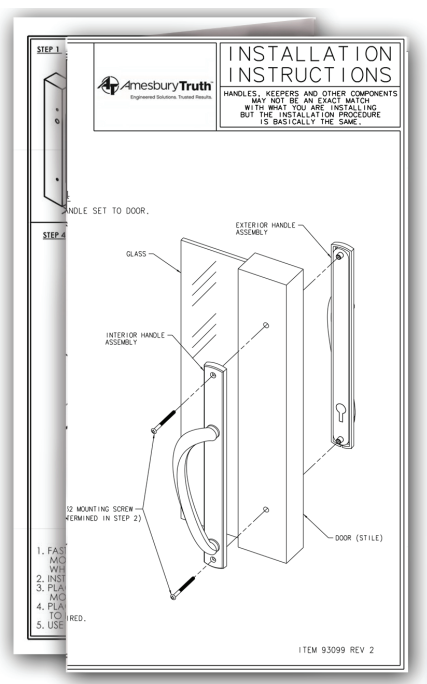

40.68.xx.102 INACTIVE HANDLE KIT

Included in the 40.68.xx.102 Inactive handle kit:

- Interior handle assembly.
- Exterior handle assembly with full length gasket.
- 3 sets of door mounting screws of 1 3/4", 2 1/8", 2 1/2" lengths to fit stile thicknesses ranging from 1.25" to 2.25".
- Assembly instruction sheet.

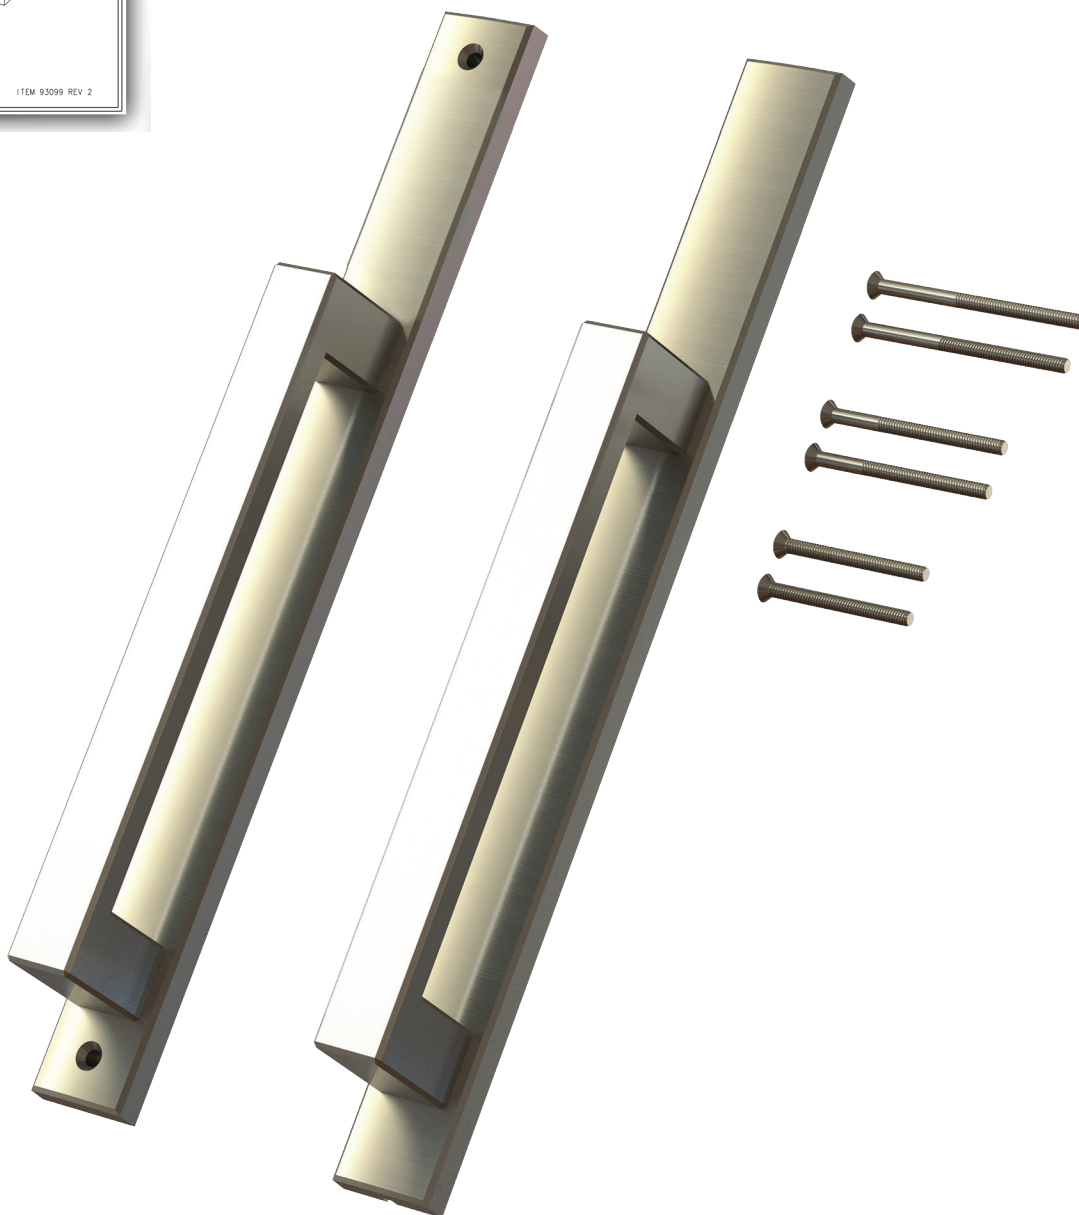

Technical drawing of a door handle assembly showing three views: front, side, and end view. Dimensions are provided in inches and millimeters.

Front View Dimensions:

- Top mounting hole diameter: .63 [15.9mm]
- Top mounting hole center-to-center distance: 13.00 [330.2mm]
- Top mounting hole diameter: 10.49 [266.5mm]
- Bottom mounting hole diameter: .85 [21.5mm]
- Bottom mounting hole center-to-center distance: 1.25 [31.8mm]

Side View Dimensions:

- Top mounting hole diameter: 1.86 [47.2mm]
- Top mounting hole center-to-center distance: .31 [7.9mm]
- Top mounting hole diameter: .38 [9.5mm]
- Top mounting hole center-to-center distance: 1.97 [50.0mm]
- Top mounting hole diameter: .17 [4.3mm]
- Top mounting hole center-to-center distance: Ø .51 [12.9mm]
- Top mounting hole diameter: 4x Ø .31 (7.8mm)
- Top mounting hole center-to-center distance: 1.25-2.25 (31.8mm-57.2mm)

End View Dimensions:



- Top mounting hole diameter: 1.25 [31.8mm]
- Top mounting hole center-to-center distance: .63 [15.9mm]
- Top mounting hole diameter: 11.92 [302.8mm]

DOOR THICKNESS RANGE


BLADE LENGTH = 1/2 (WILL VARY; FORMULA)

4

SIGNATURE SERIES THUMBTURN STYLE DOOR HANDLES APPLICATION (STANDARD APPLICATION)

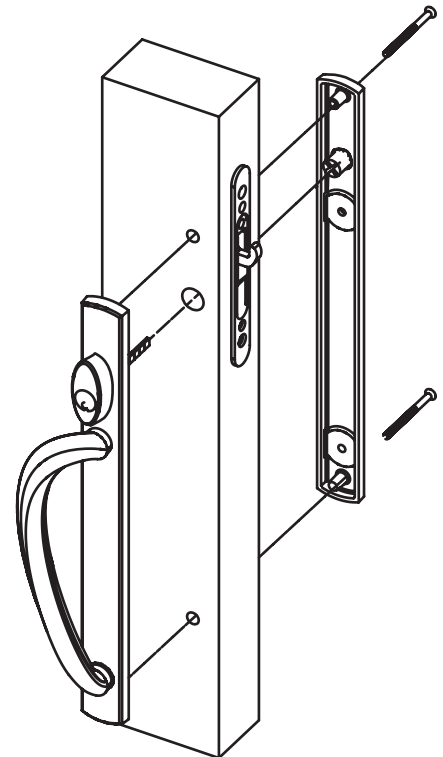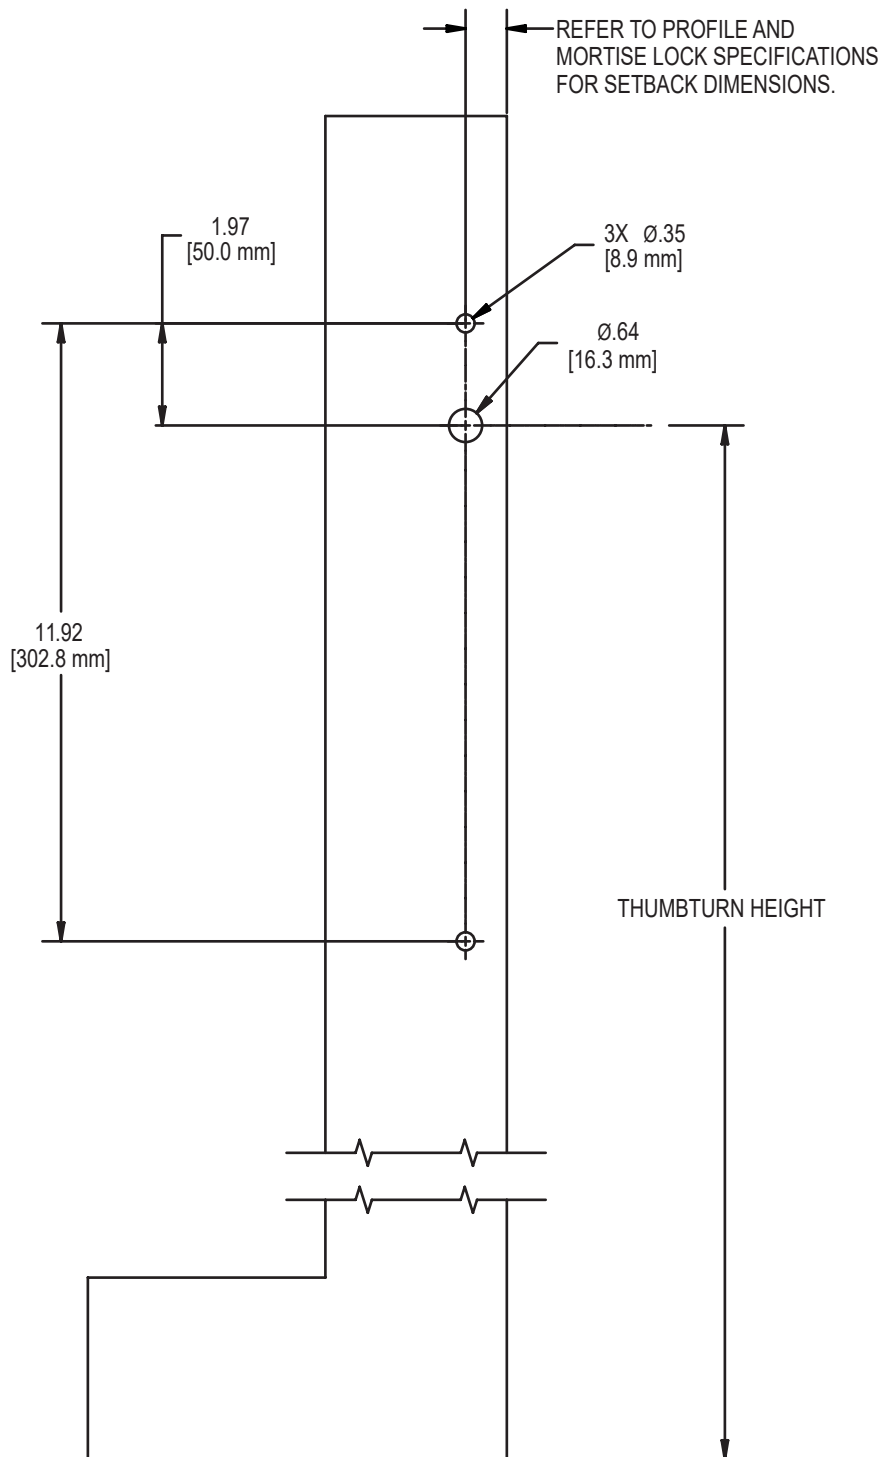


SINGLE POINT
MORTISE LOCK

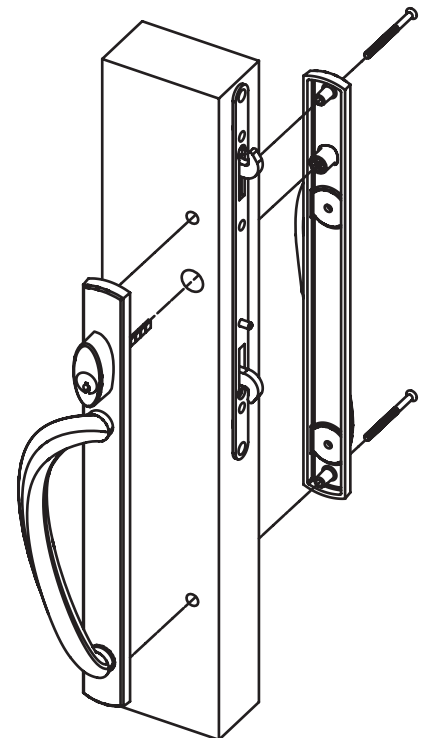

GEMINI 2
MORTISE LOCK

SIGNATURE SERIES THUMBTURN STYLE DOOR HANDLES APPLICATION (CARTWHEEL APPLICATION)

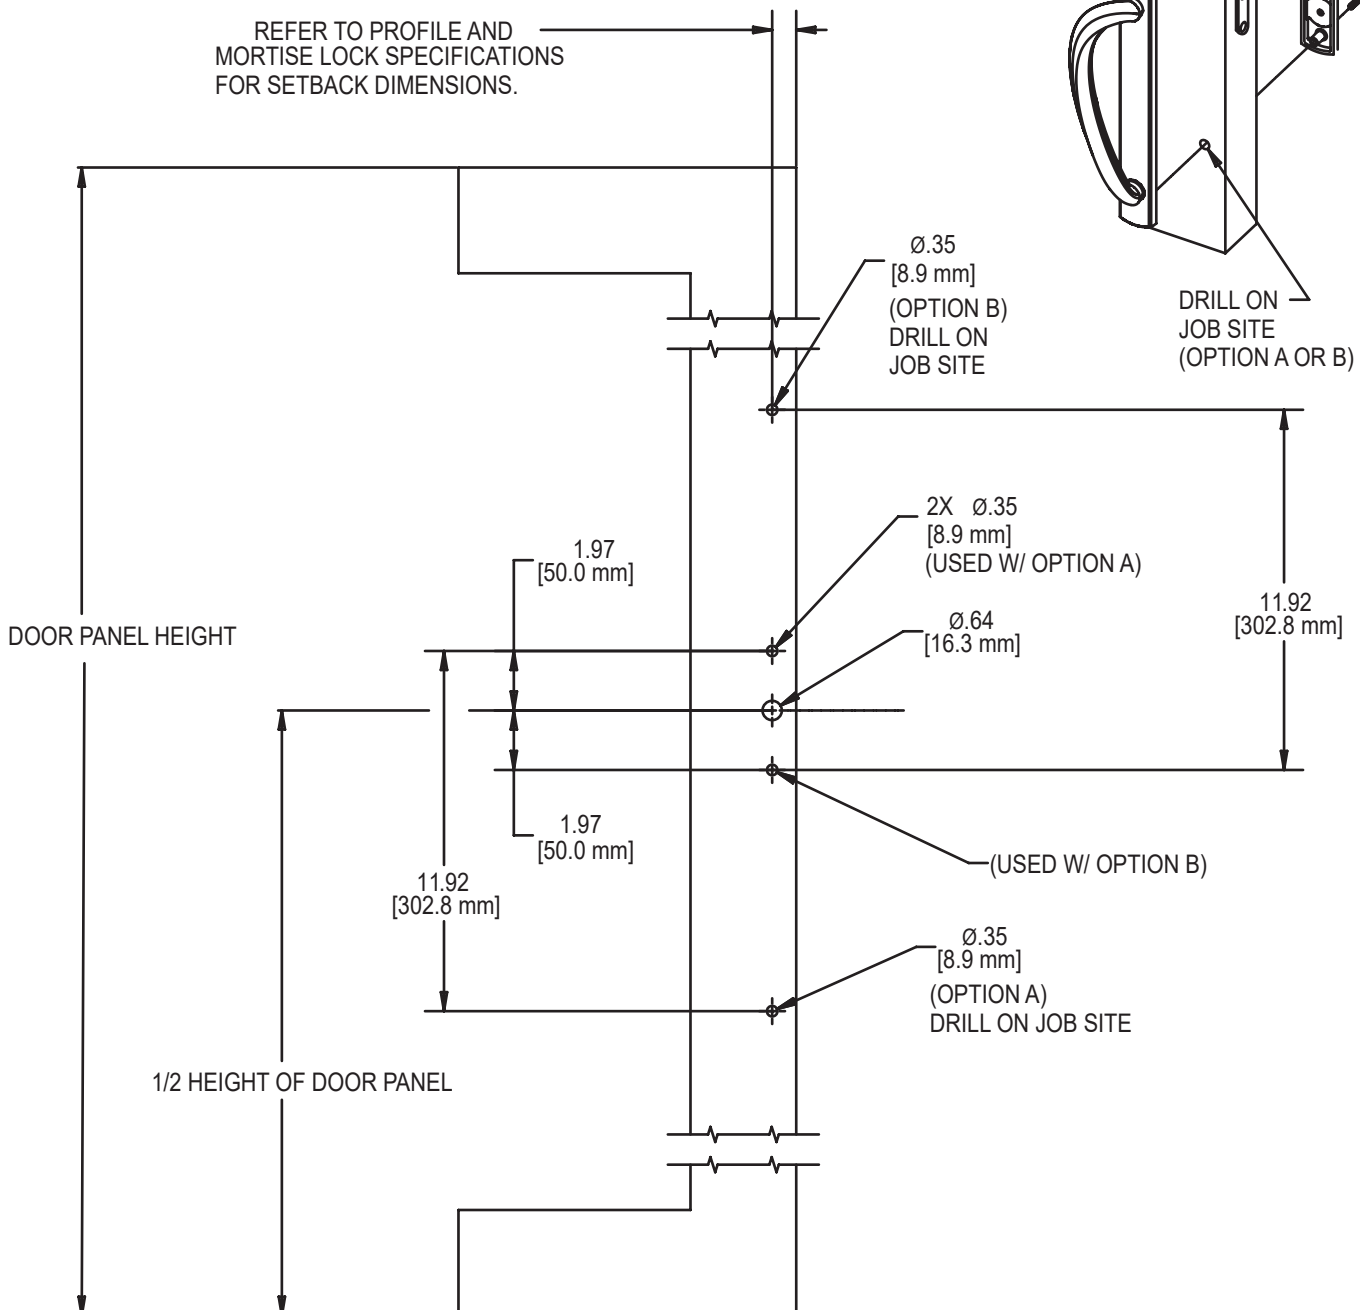


Signature 40.68

Compatible Locks:

The Signature Series 40.68 handle sets work with single point, 2 point, and 3 point locks.

AmesburyTruth's technical applications specialists can help assist with determining the best lock for the door system you are fabricating.

The applications team can be reached at:
ApplicationSpecialists@truth.com

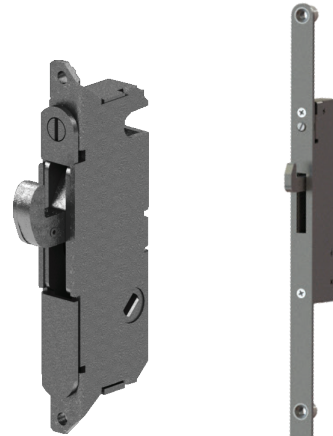

Single Point



**Gemini
2 - Point**



**Nexus
2 - Point**



**Nexus
3 - Point**