
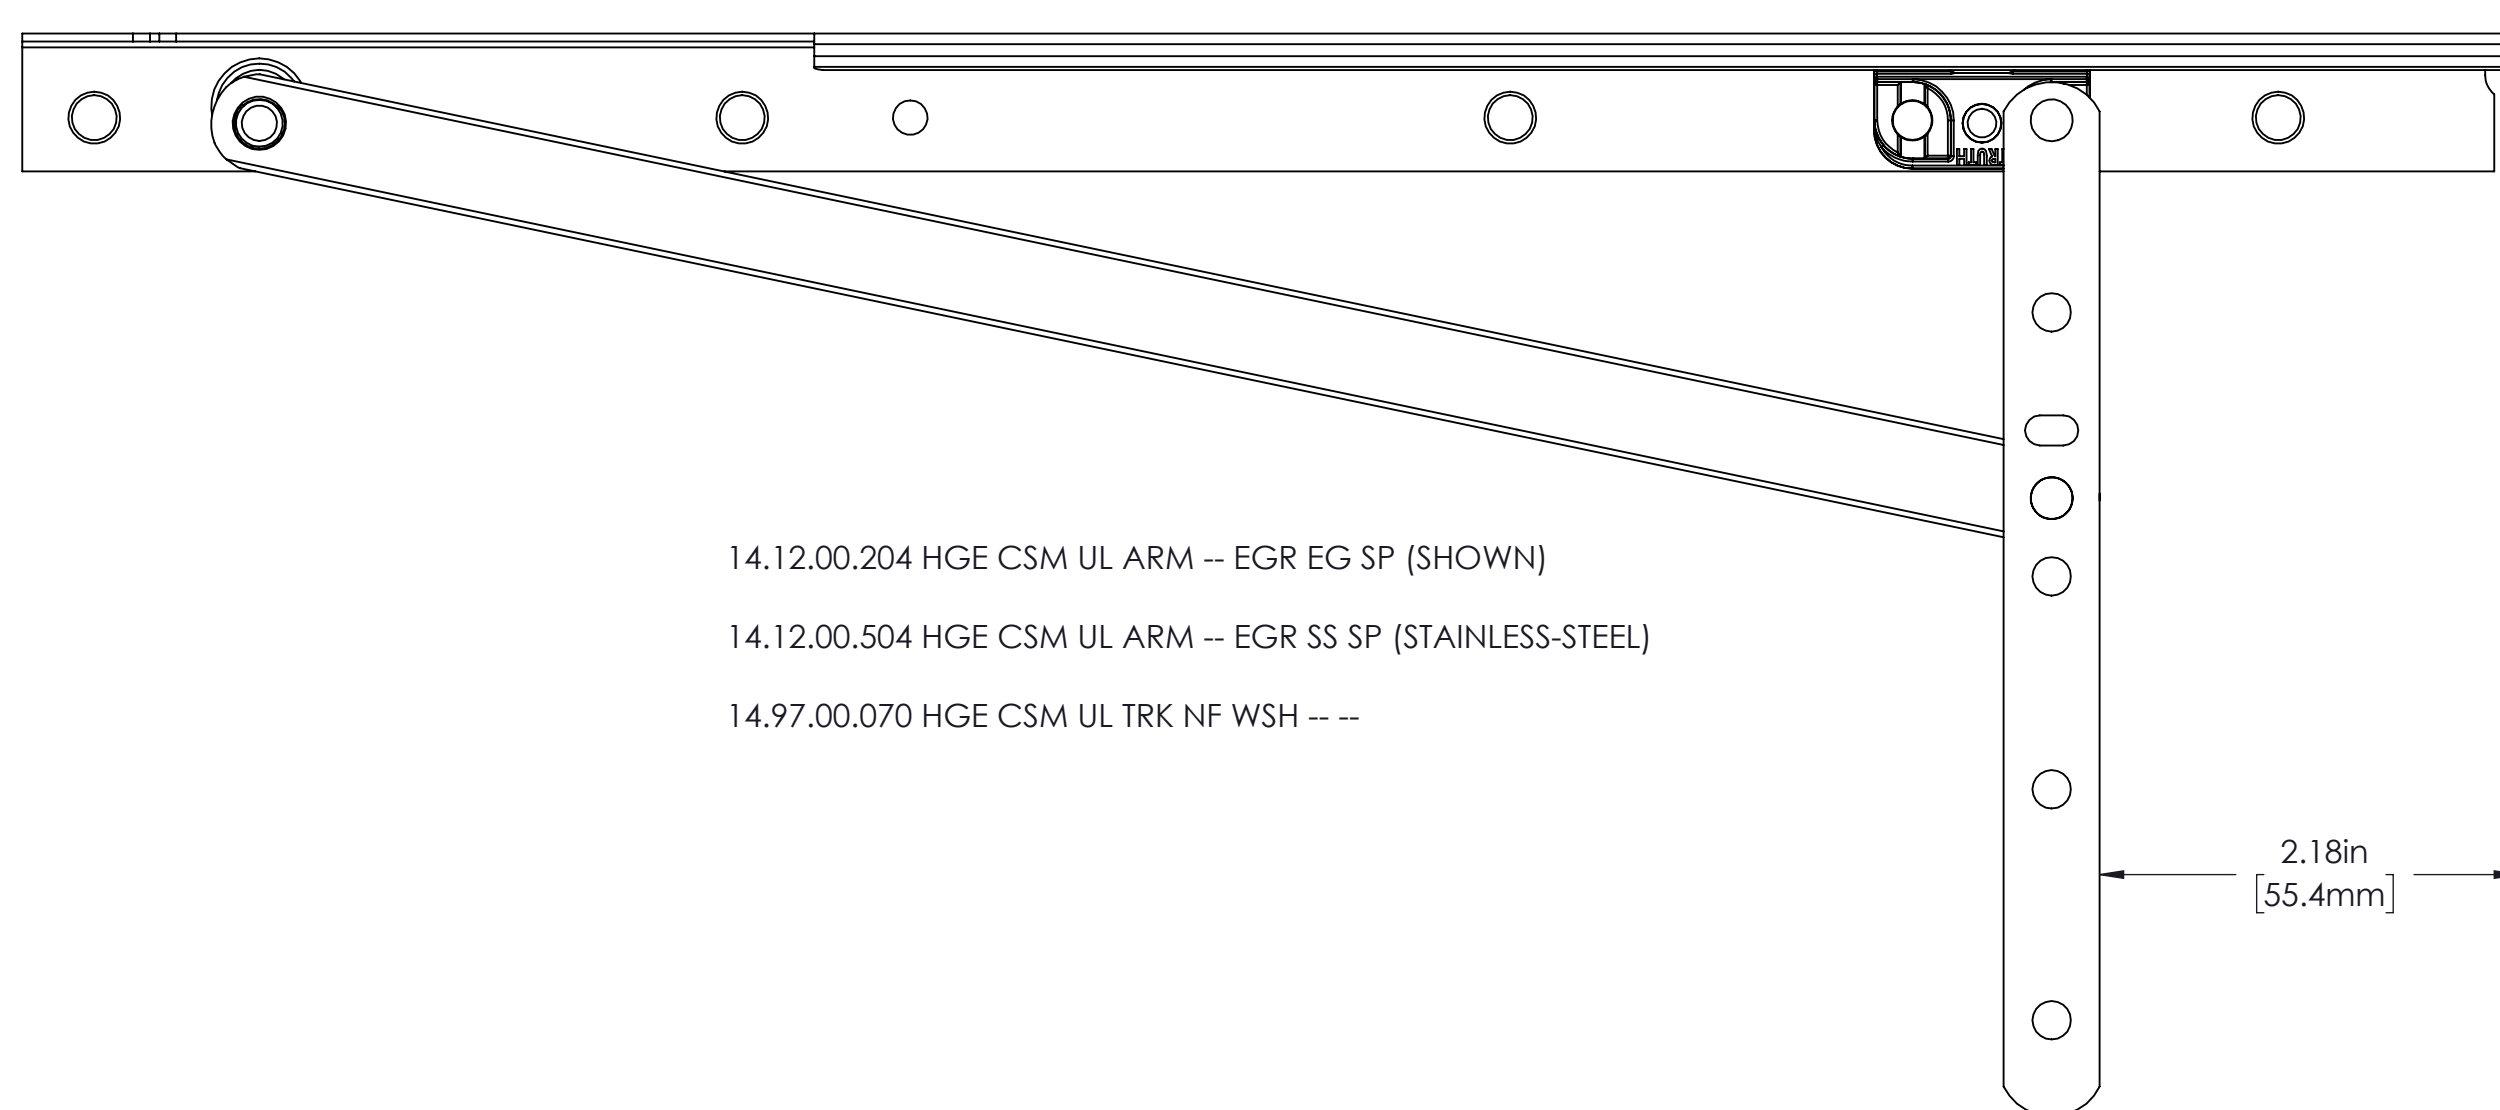
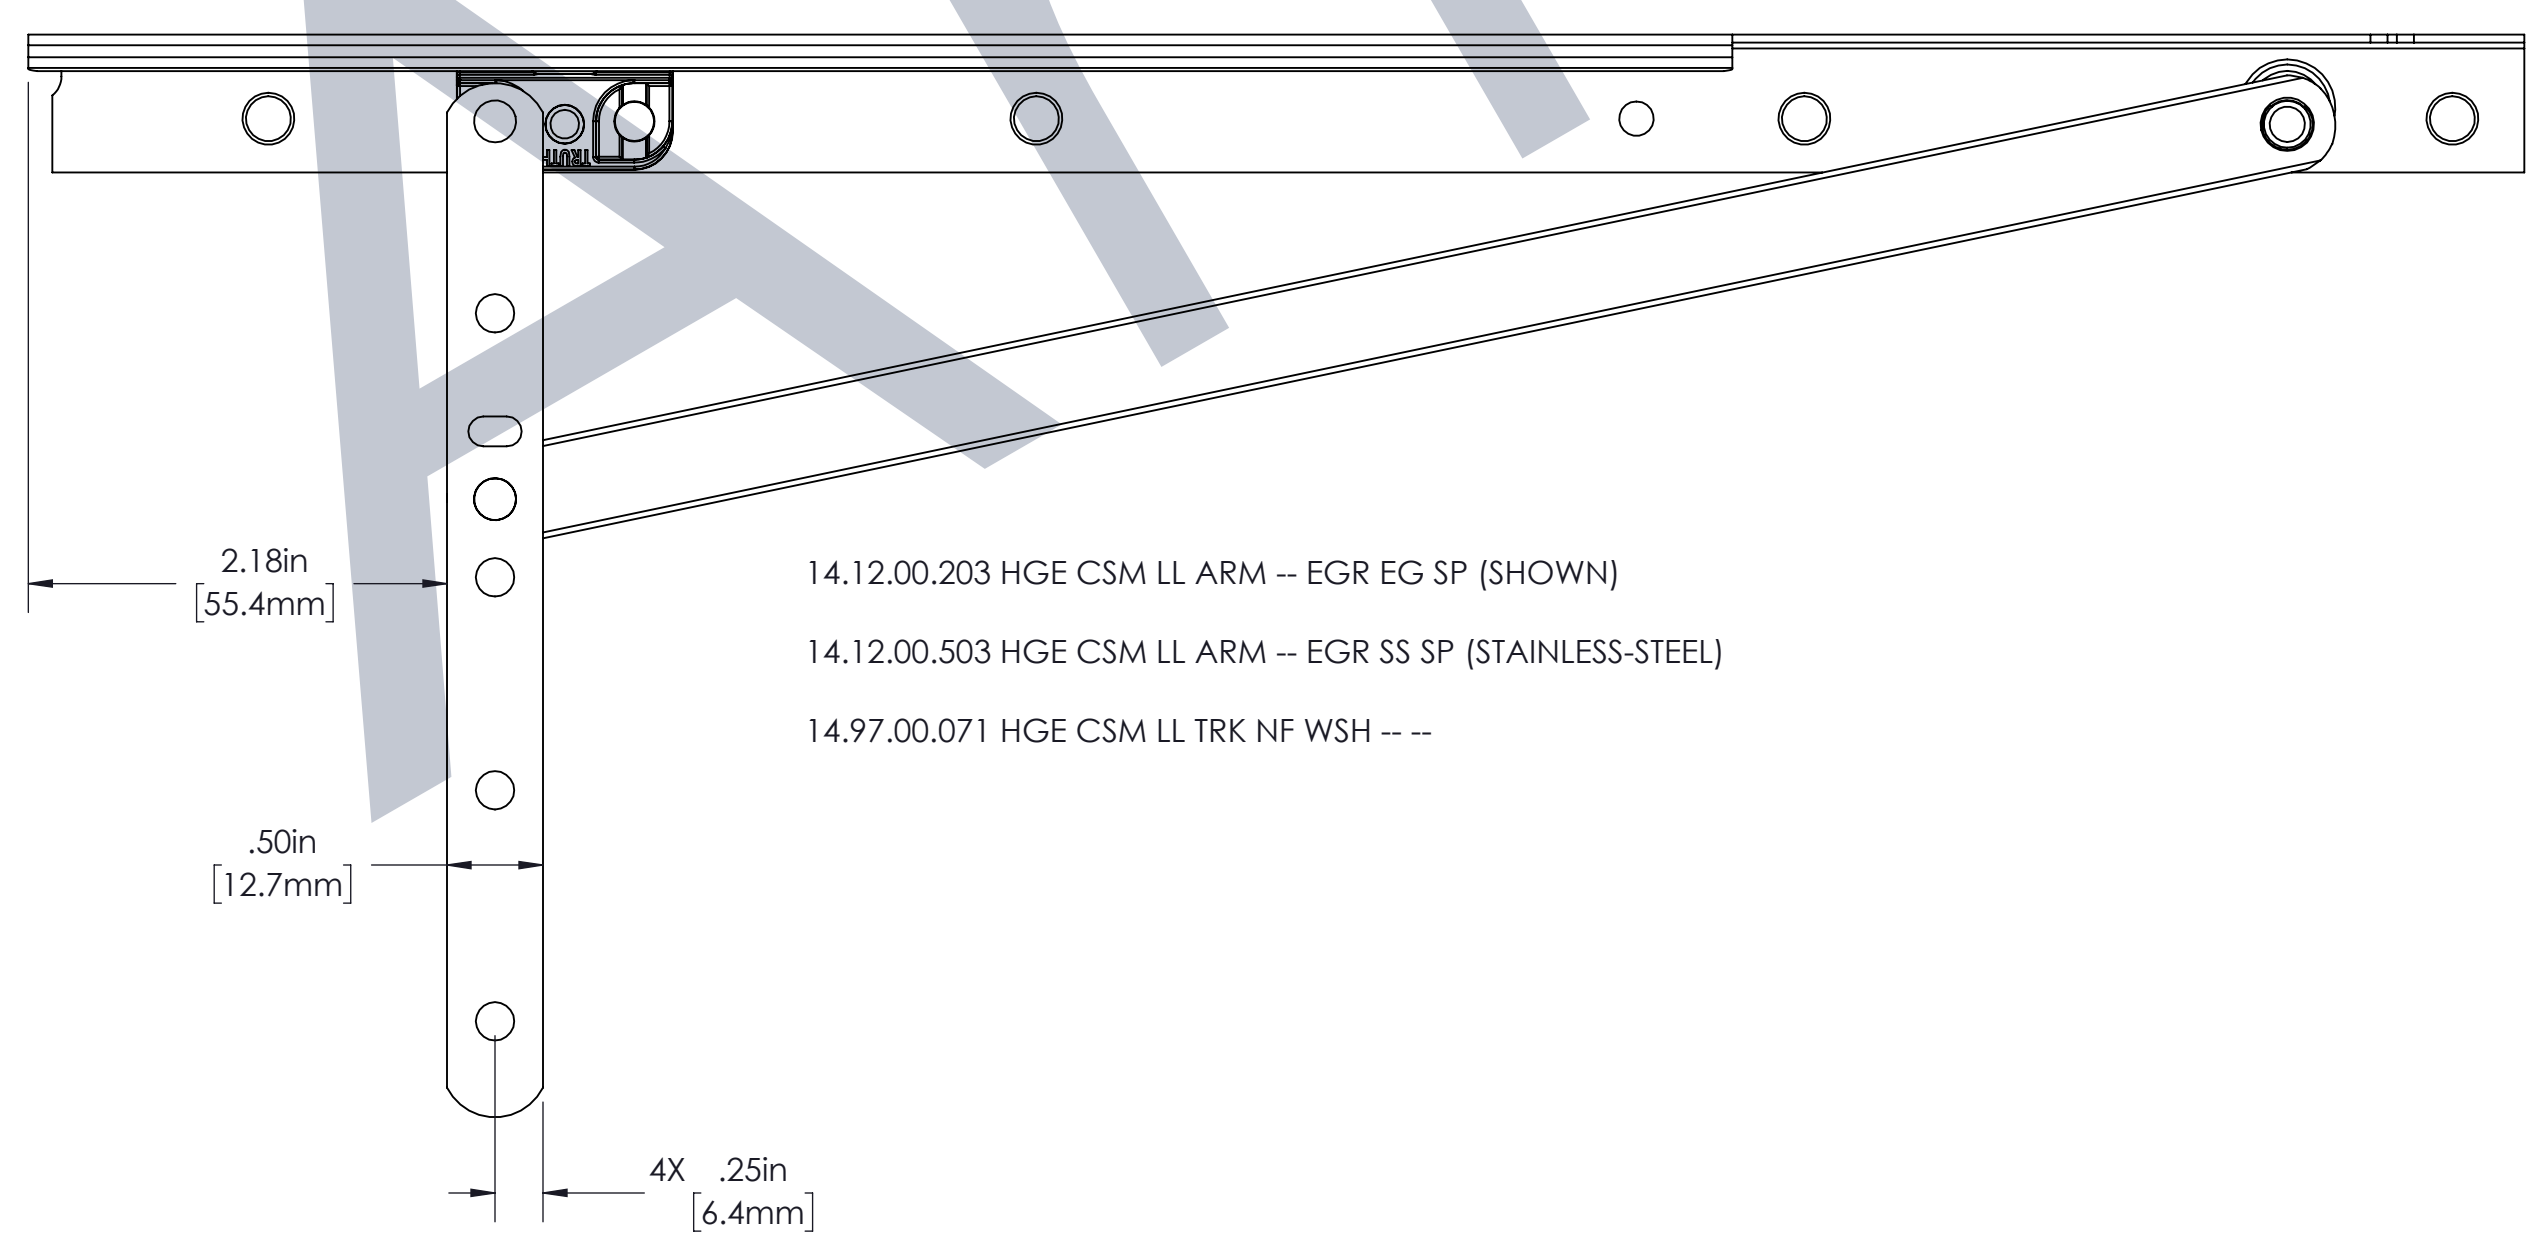
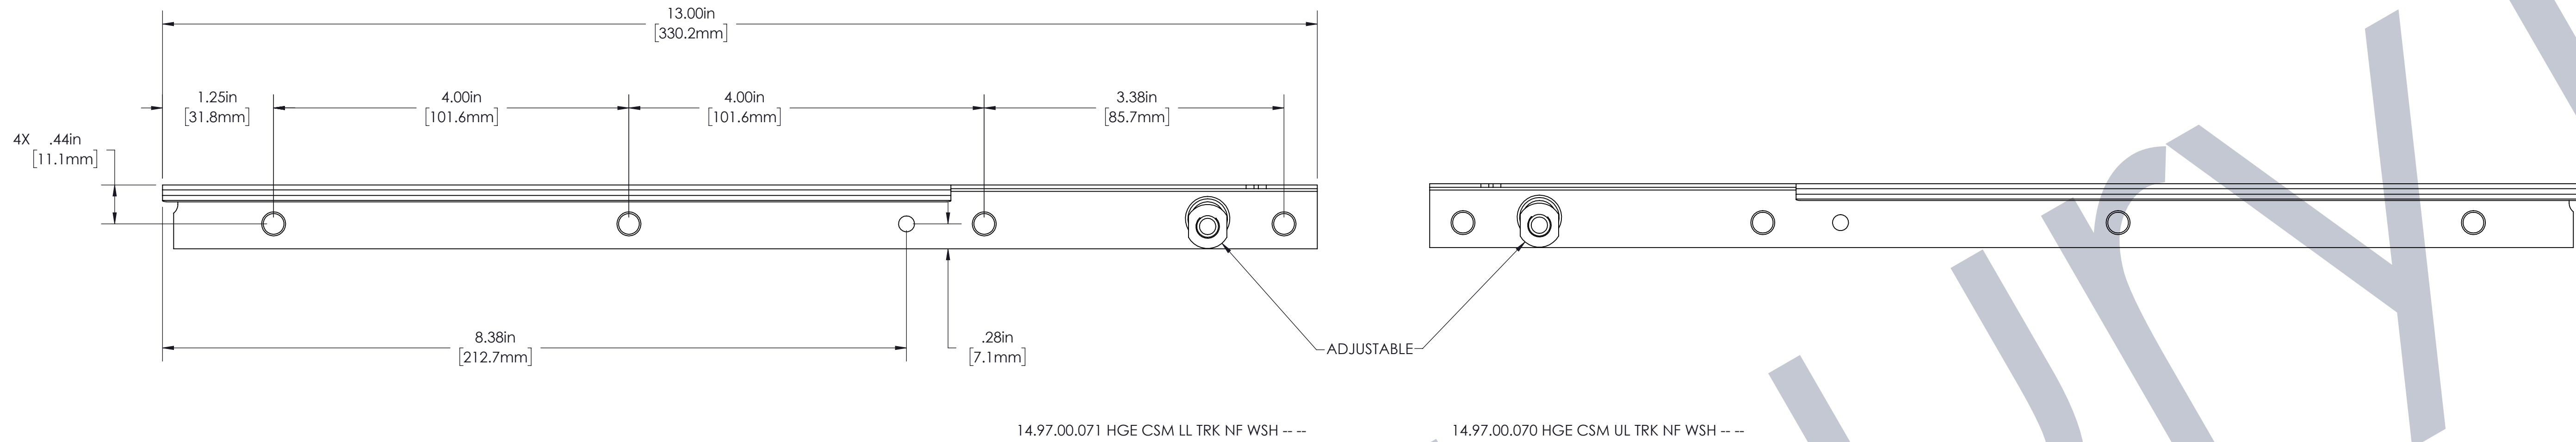
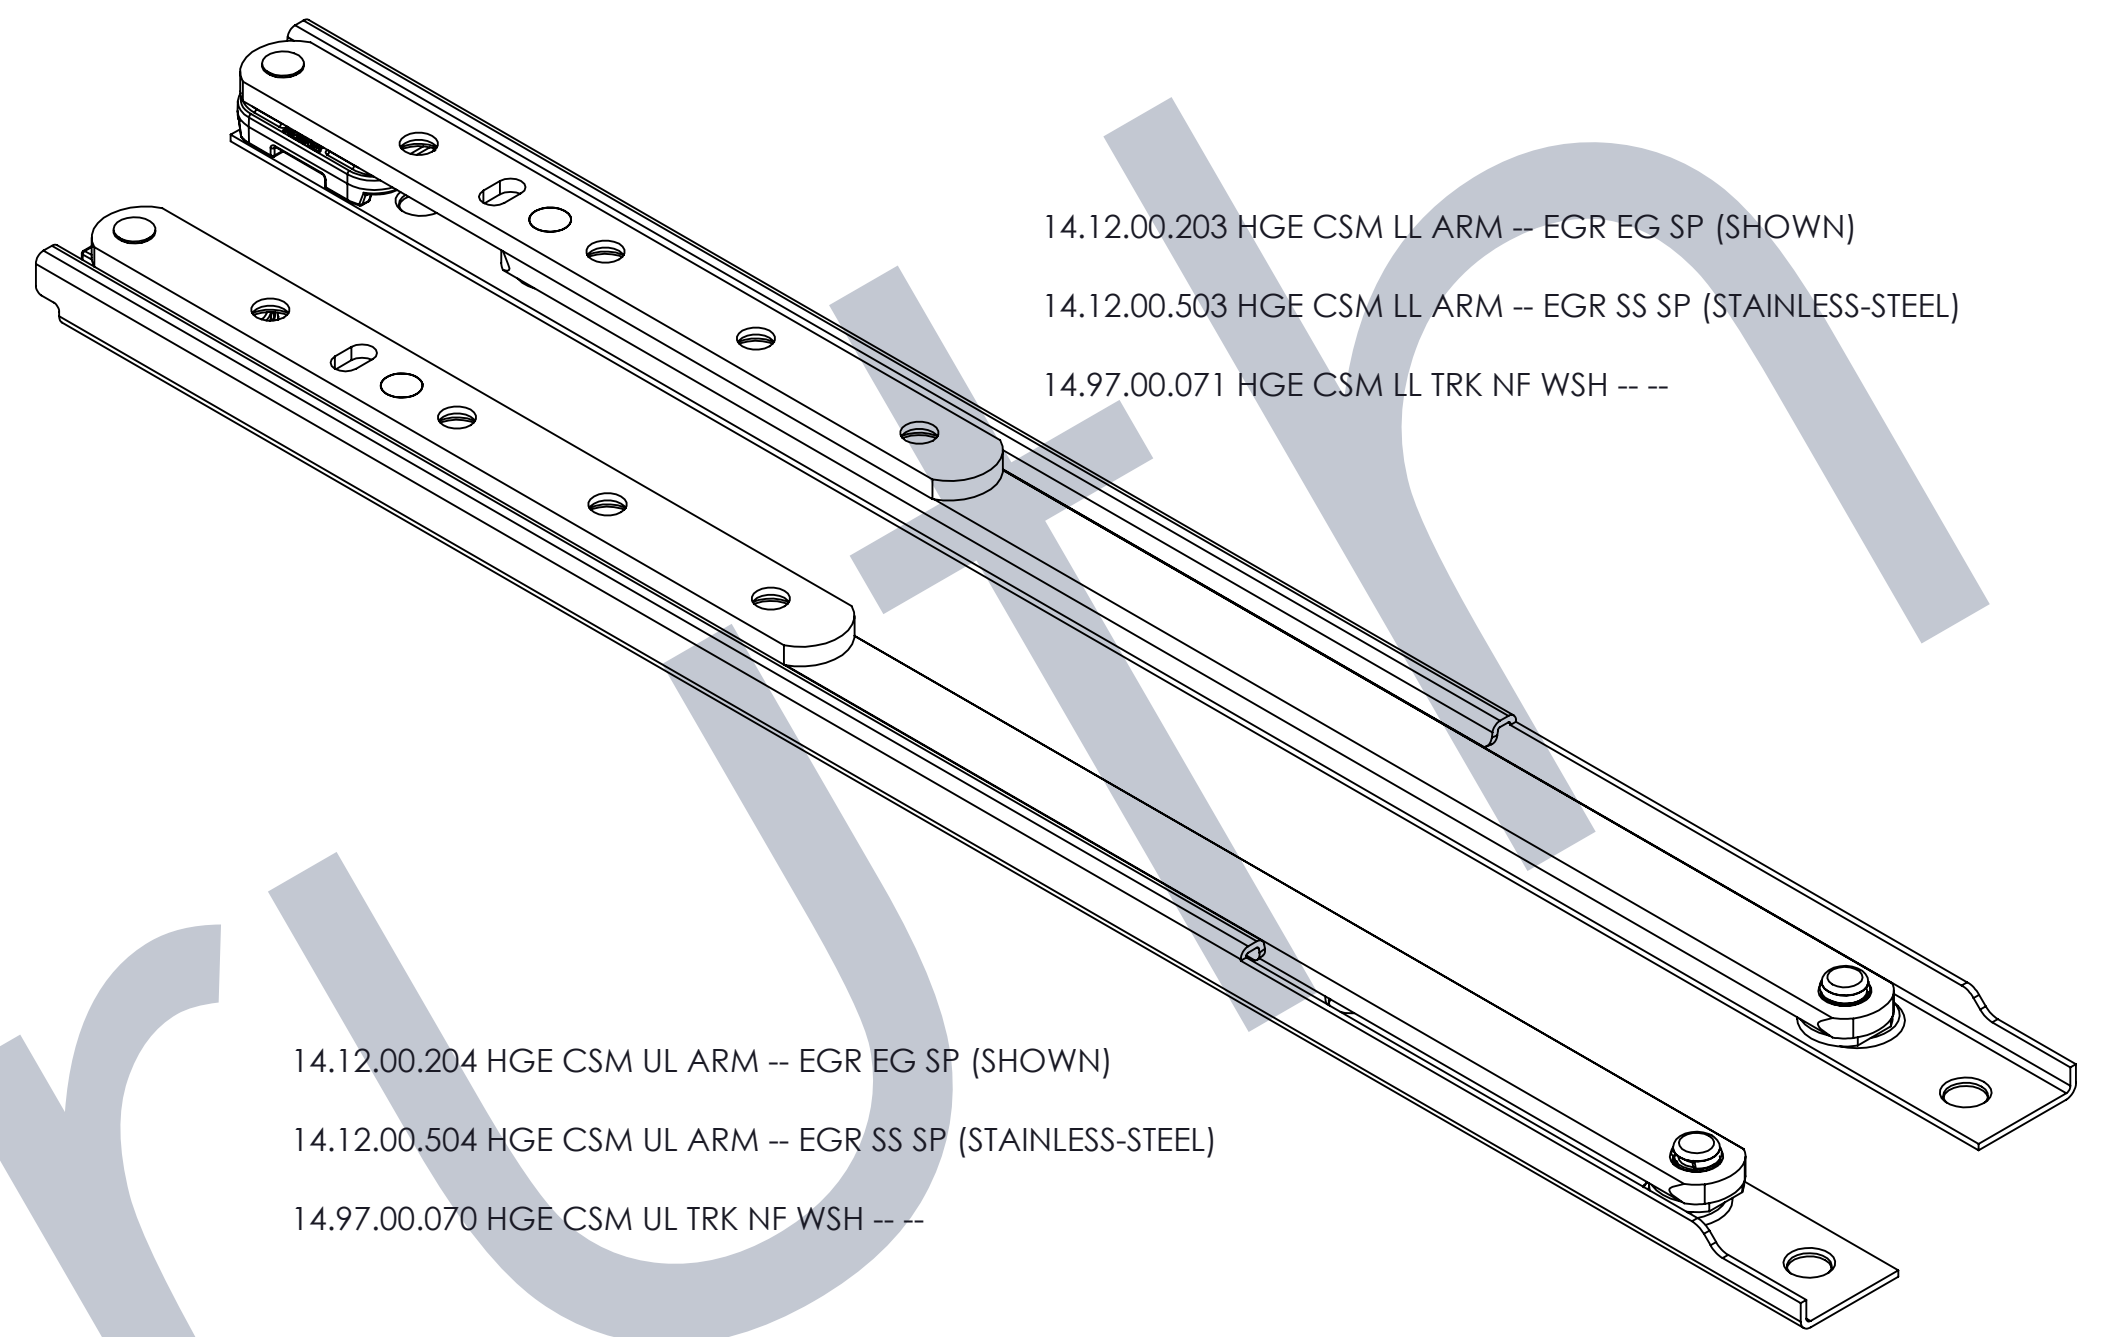
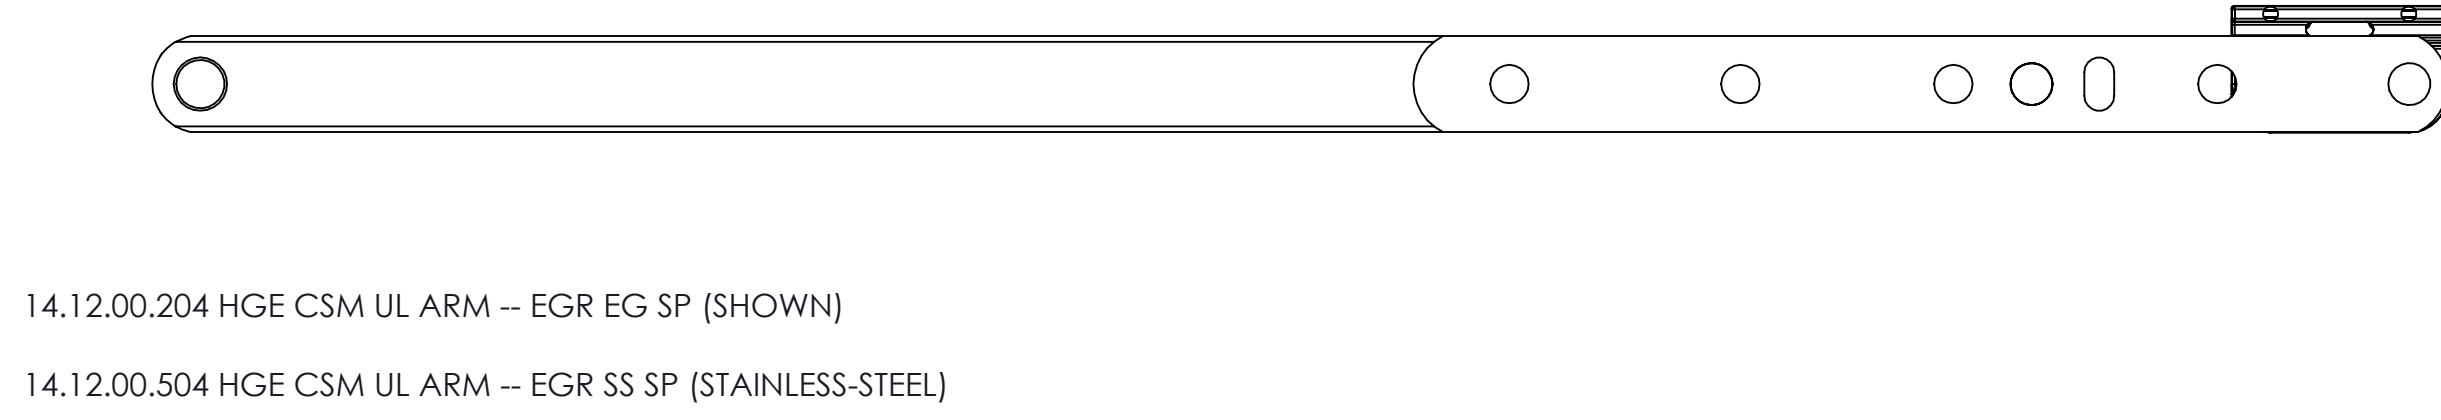


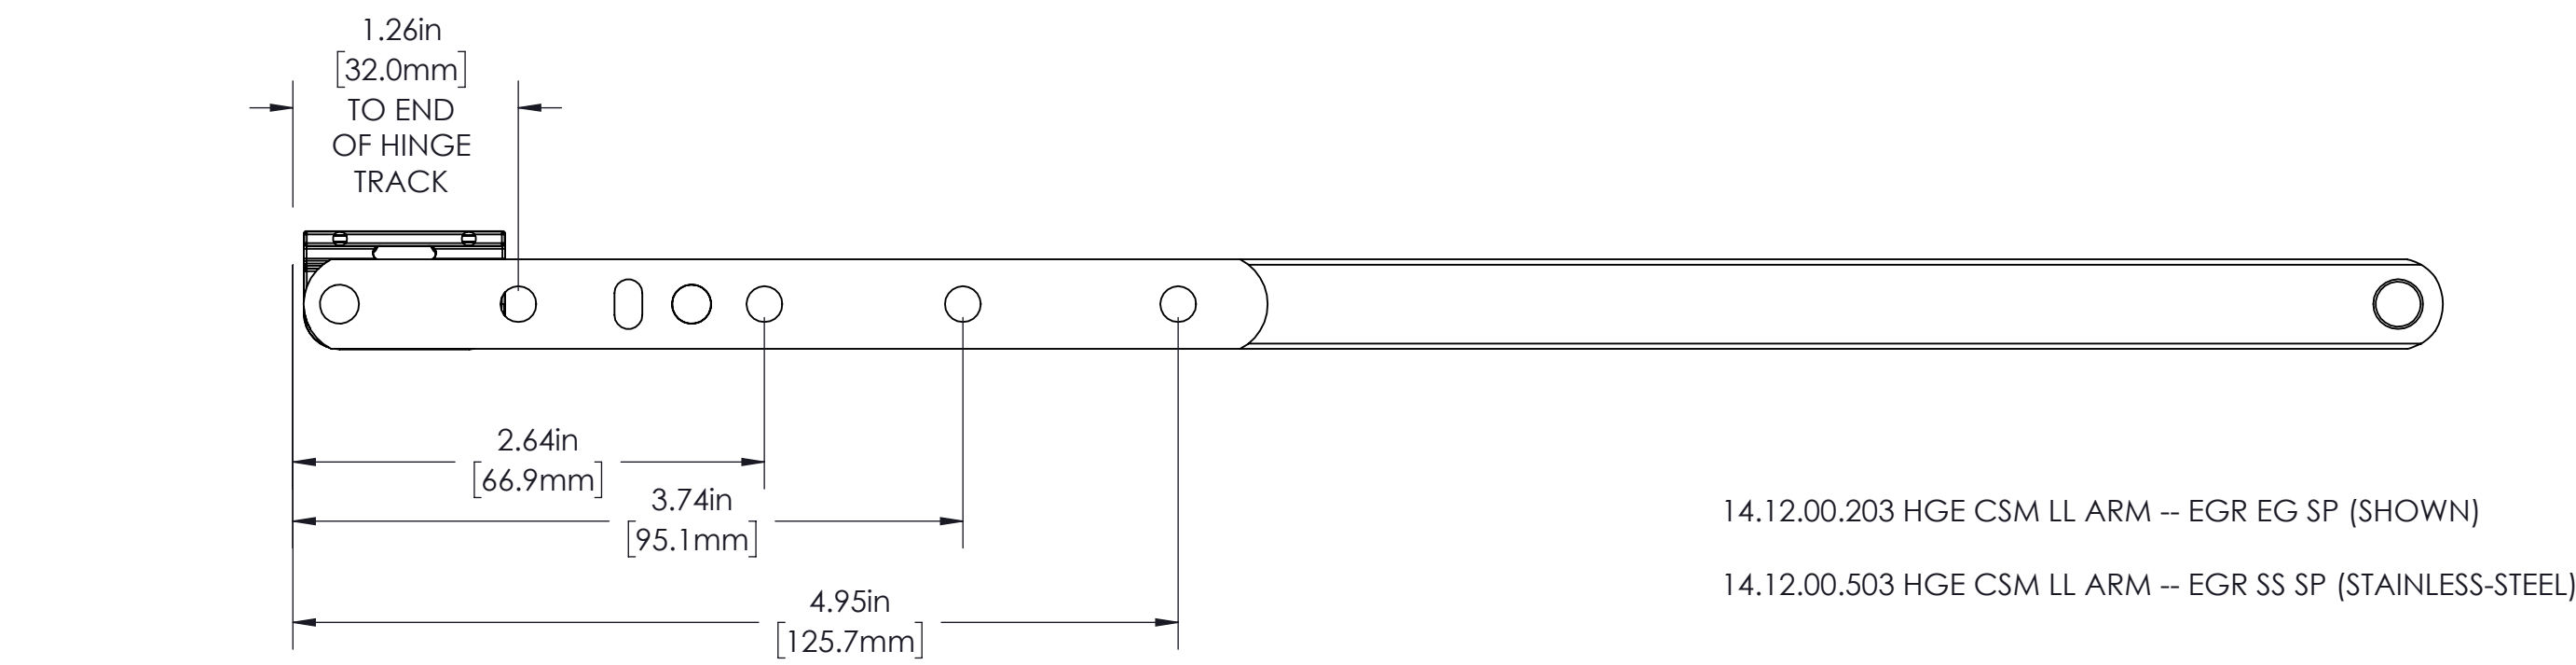

NOTES:
1. NOT FOR USE ON AWNING WINDOWS.
2. SEE OPERATOR/HINGE COMPATABILITY INFORMATION GIVEN FOR EACH OPERATOR. SEE RESPECTIVE CATALOG PAGE FOR OPERATOR OF YOUR CHOICE.
3. RECOMMENDED SCREWS PER PAIR OF HINGE:
SASH ARM- (QTY 8) #7 X .750 PHILLIPS FLAT HEAD, STEEL, SHEET METAL SCREWS.
TRACK- (QTY 6) #7 X .750 PHILLIPS FLAT HEAD, UNDERCUT, SST, SHEET METAL SCREWS.